
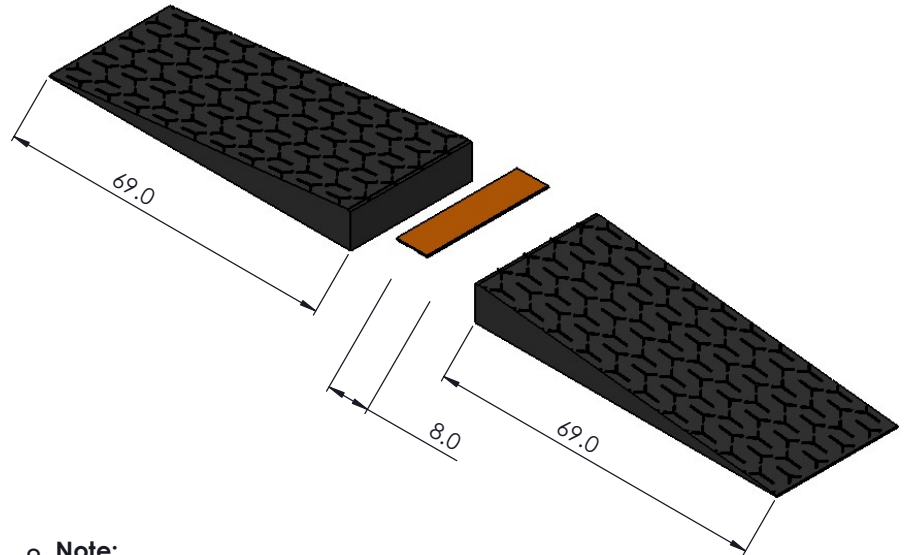
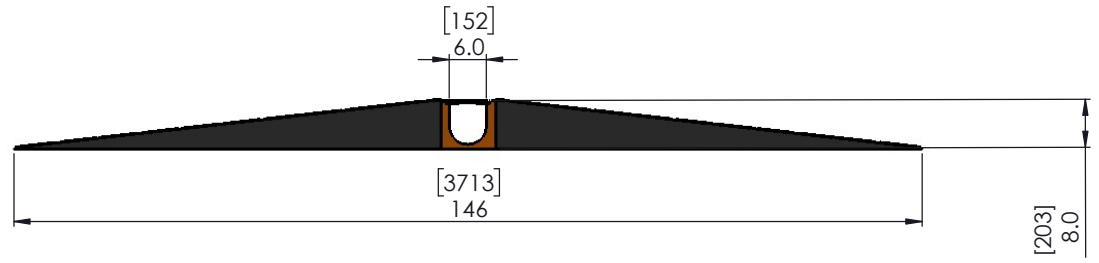


ZONE	REV	DESCRIPTION	DATE	APPROVAL
	1	PRELIMINARY RELEASE	6/12/2018	CN

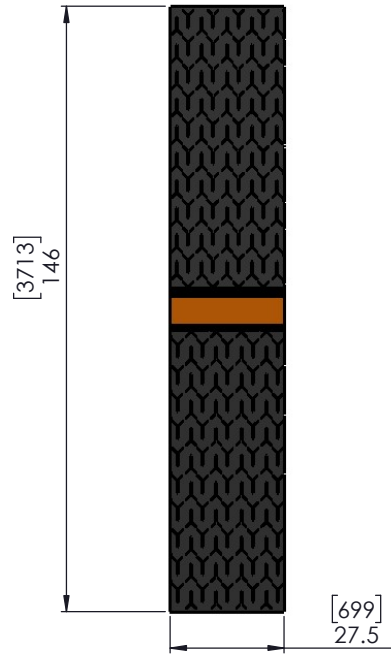

Technical Data Sheet - XG1600		
Description	Imperial	Metric
Product - Length x Width x Height	146 x 27.5 x 8	3708 x 699 x 203
Channel Size	6 x 6	152 x 152
Product Weight (lbs)	570	258
Load Capacity	600 Tons	544K
Operating Temperature	-20°F up to +140°F	-30°C up to +60°C
Measurements are approximate	Imperial = inches & lbs.	Metric = mm & kg.

Standard Colors - Black Base/Orange Lid
 Material - Polyurethane
 Durometer - 90 Shore A Base +/- 5 --- 55D Shore D Lid +/-5
 Manufacture in USA

- Note:
 - Left Ramp, Right Ramp, and Channel connected together using Reinforced Fiberglass Rods
 - Ability to add Additional Channels as needed

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE ESAC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THE ELASCO IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/32 ANGULAR: MACH ± 1° BEND ± 1° .X = ± .1 .XX = ± .01 .XXX = ± .005	Elasco Products, LLC 18065 Redondo Circle Huntington Beach, CA 92648	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS AND TOLERANCES PER ASME Y14.3M	DRAWN: CN 6/12/2017 CHECKED: APPROVED: ELECTRONIC SIGNATURE ON FILE	TITLE: XTREME GUARD 6" Channel
		SCALE: 1:12	SHEET 1 OF 1